



professional control devices

TwinController • HUMIDITY

Vers. 01-21



Available in:



4 + 4 AMP



12 + 12 AMP

HYBRID AND MULTIFUNCTIONAL

Control your environment

Original Dutch brand 

www.cli-mate.pro



Serie: TW.H
Type: TW.H-4 / TW.H-12

TwinController • HUMIDITY

Vers. 01-21

TEMPERATURE, HUMIDITY, MIN. SPEED (IN&OUT), NEGATIVE PRESSURE

Automatic – professional

- Controls the AIR-intake & AIR-outtake with independent settings
- Fully adjustable, automatic temperature and humidity control
- Total amperage: 8 & 24 amp.
- Easy to calibrate using knobs
- Includes a mounting cooling plate on the back side
- Incorporates a double sensor of temperature and humidity


Controls humidity

Controls the negative pressure

Independent IN & OUT settings

Technical data

Temperature range	: 5 - 55 °C
Humidity range	: 20-100% rH
Power supply	: 220/230V – 50Hz
Switching differential	: 1°C / ±5% rH per step
Protection class	: IP44
Measures	: 220 x 140 x 110 mm

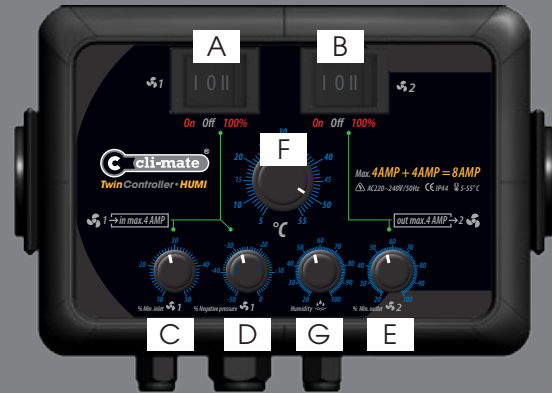

- A = ON/100/OFF button Fan/s 1 E = Min. % Fan/s 2
 B = ON/100/OFF button Fan/s 2 F = Choose the desired temperature
 C = Min. % Fan/s 1 G = Set the desired humidity level
 D = Negative pressure setting

NOTE: **NEVER** surpass the maximum charge recommended! (AC motors)



The design and the writing of this leaflet have been realized with the most thorough accuracy. We do not take responsibility for printing or typing mistakes.