



professional control devices

MultiController

Vers. 01-21



Available in:



7+7 AMP



12+12 AMP



16+16 AMP

ADVANCED CLIMATE SOLUTIONS



www.cli-mate.pro

Control your environment



Serie: MC Type: MC-7-7 / MC-12-12 / MC16-16

MultiController

Vers. 01-21

TEMPERATURE, MIN., MAX. SPEED & HYSTERESIS

Automatic - Professional

Two climate controllers with hysteresis in one device.
Allows for the following applications:

- Independent and specific setting for the air intake and outtake
- Controls two different rooms or spaces with independent settings
- 26 total AMP
- 2 external temperature sensors
- Fully adjustable, automatic temperature control
- Advanced hysteresis fan speed adjustment with 7°C of bandwidth
- 4 Fan inlets on the sides of the device
- Easy to calibrate using knobs
- Includes a mounting cooling plate on the


Independent IN & OUT settings

Controls 2 different spaces

Total max. amperage 32AMP

Technical data

Temperature range	: 5-55°C
Power supply	: 220/230V – 50Hz
Switching differential	: 1°C per step (hysteresis)
Protection class	: IP44
Measures	: 230 x 150 x 85 mm

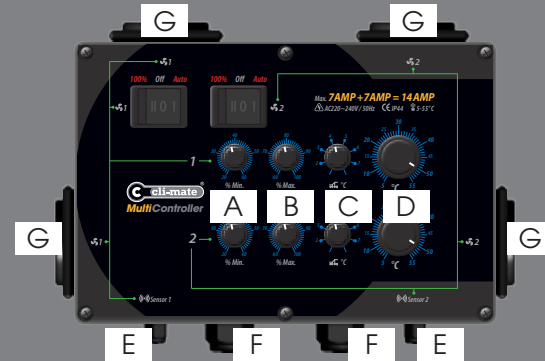

Settings for Group 1
Settings for Group 2

- A = Set the min. Fan Speed
- B = Set the max. Fan Speed
- C = Set the bandwidth(hysteresis)
- D = Set the desired temperature
- E = External temperature sensor
- F = Supply
- G = Fan/s inlet

NOTE: **NEVER** surpass the maximum charge recommended! (AC motors)



The design and the writing of this leaflet have been realized with the most thorough accuracy. We do not take responsibility for printing or typing mistakes.